



THE TILE BOUTIQUE

Exclusive Designer Tiles Collection



design
elegance

150x900MM



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 104

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 105

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 107

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 108

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 109

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 110

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 111

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 112

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES




RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection

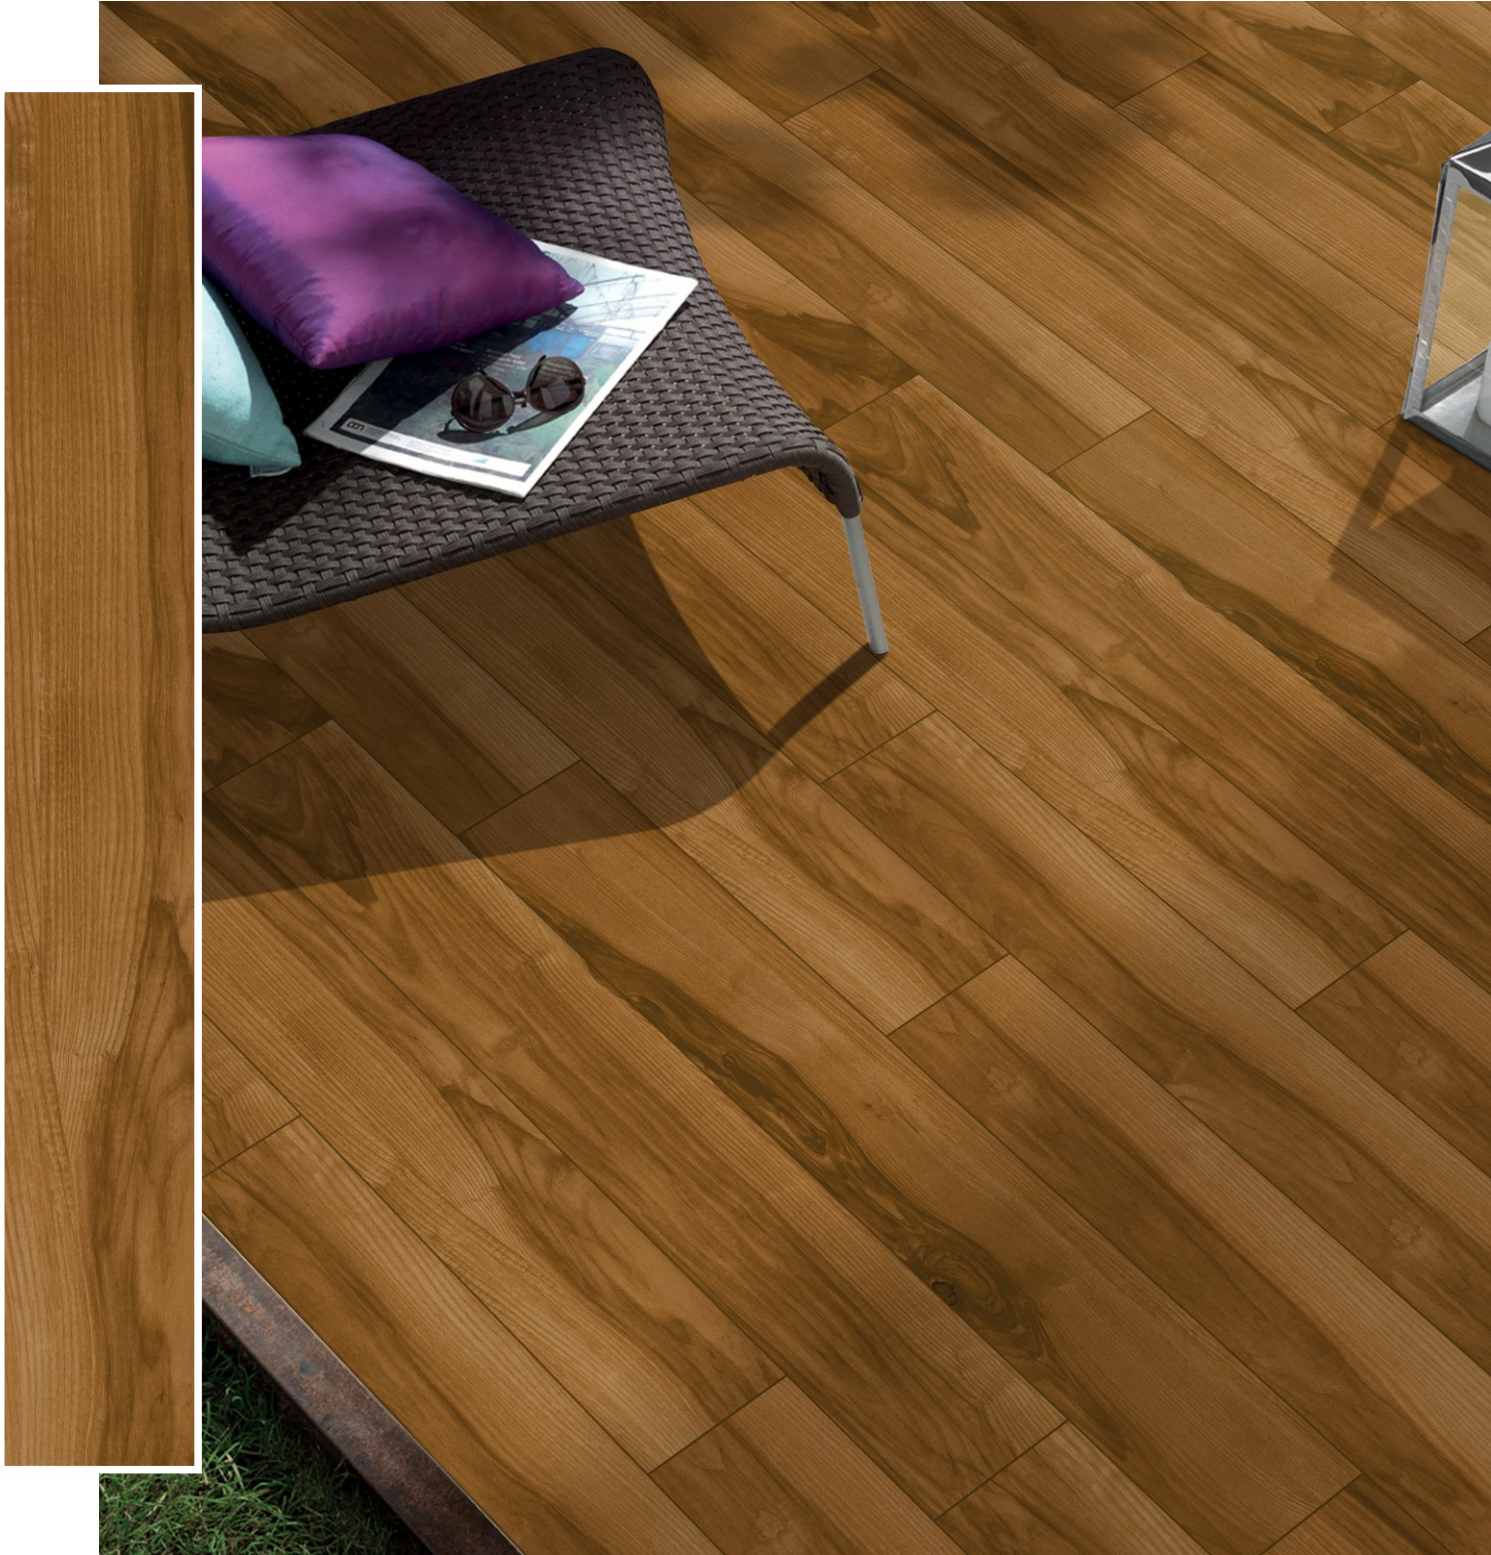

NRC 114

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES




RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection

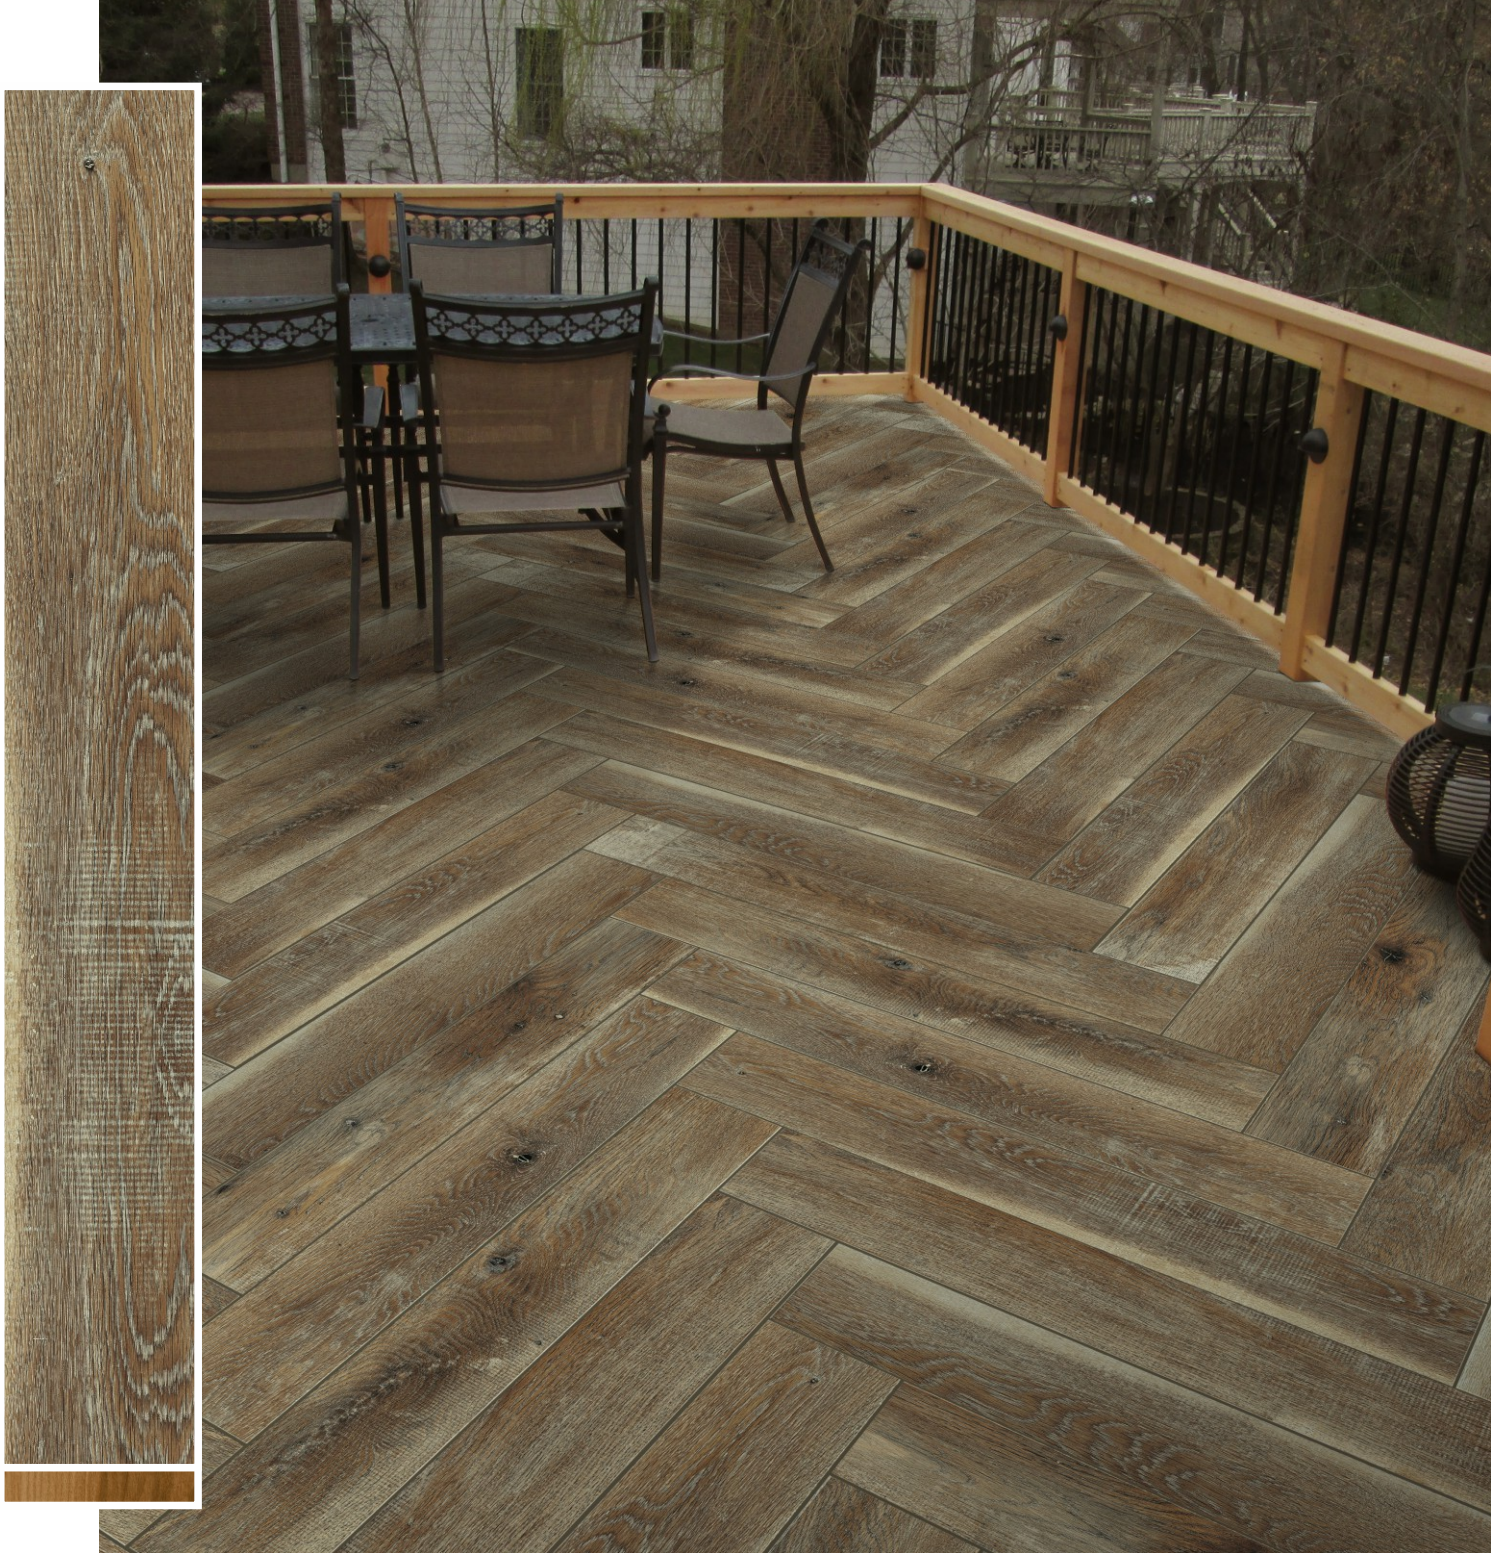

NRC 406

150x900MM | WOODEN PLANK TILES



SUITABLE FOR WALL & FLOOR



BRIGHT FINISHING TILES



RANDOM PATTERN



USE GROUTING FOR BETTER LAYING



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 408

150x
900MM | WOODEN
PLANK TILES



THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING



NRC 601

150x
900MM | WOODEN
PLANK TILES



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING






















THE TILE BOUTIQUE
Exclusive Designer Tiles Collection



NRC 602

**150x
900MM** | **WOODEN
PLANK TILES**

SPECIFICATIONS

| Sr. No. | Pictogram | Property | International Std. ISO 13006/EN 176 Group | Tiles Value | Method of Testing |
|---------|---|---|---|----------------------------------|-------------------------|
| 1 |  | Deviation in length | +/-0.6% | +/-0.3% | ISO 10545 Pt 2 |
| 2 |  | Deviation in thickness | +/-5% | +/-3% | ISO 10545 Pt 2 |
| 3 |  | Straightness of sides | +/-0.5% | +/-0.1% | ISO 10545 Pt 2 |
| 4 |  | Rectangularity | +/-0.6% | +/-0.2% | ISO 10545 Pt 2 |
| 5 |  | **Surface flatness | +/-0.5% | +/-0.2% | ISO 10545 Pt 2 |
| 6 |  | Water absorption | < 6 - 8% | < 6 - 8% | ISO 10545 Pt 3 |
| 7 |  | *Mohs hardness | >6 | >6 | EN 101 |
| 8 |  | Flexural strength | >35N/mm ² | ³ 46N/mm ² | ISO 10545 Pt 4 |
| 9 |  | Abrasion resistance | <175 mm ² | <144 mm ³ | ISO 10545 Pt 6 |
| 10 |  | **Skid resistance (Friction coefficient) | >0.4 | >0.4 | ISO 10545 Pt 17 |
| 11 |  | Breaking strength | 1113 N | 2800 N | ISO 10545 Pt 4 |
| 12 |  | Frost resistance | Frost proof | Frost proof | ISO 10545 Pt 12 |
| 13 |  | Chemical resistance | No Damage | No Damage | ISO 10545 Pt 13 |
| 14 |  | Thermal shock resistance | No Damage | No Damage | ISO 10545 Pt 9 |
| 15 |  | Colour resistance | No Damage | No Damage | DIN 51094 |
| 16 |  | Stain resistance | Resistance | Resistance | ISO 10545-14 |
| 17 |  | Moisture expansion | Nil | Nil | ISO 10545-10 |
| 18 |  | **Glossiness | - | Min.80% reflection | Glossmeter |
| 19 |  | Resistance to Surface Abrasion (of tiles intended for use on Floors)*** | Abrasion class shall be specified by the manufacturer | PEI Group V | ISO-10545-7 IS:13630-11 |

PACKING DETAILS

| Sr. No. | Size | No. of Tiles Per Box | Coverage Area in Sq. Feet | Approx. Weight / Box |
|---------|-----------|----------------------|---------------------------|----------------------|
| 1 | 150x900mm | 8 Pcs. | 11.62 Sq. Ft | 23.2 Kg |

APPLICATIONS

