


MOULD WOODEN STRIP 200X1200 MM








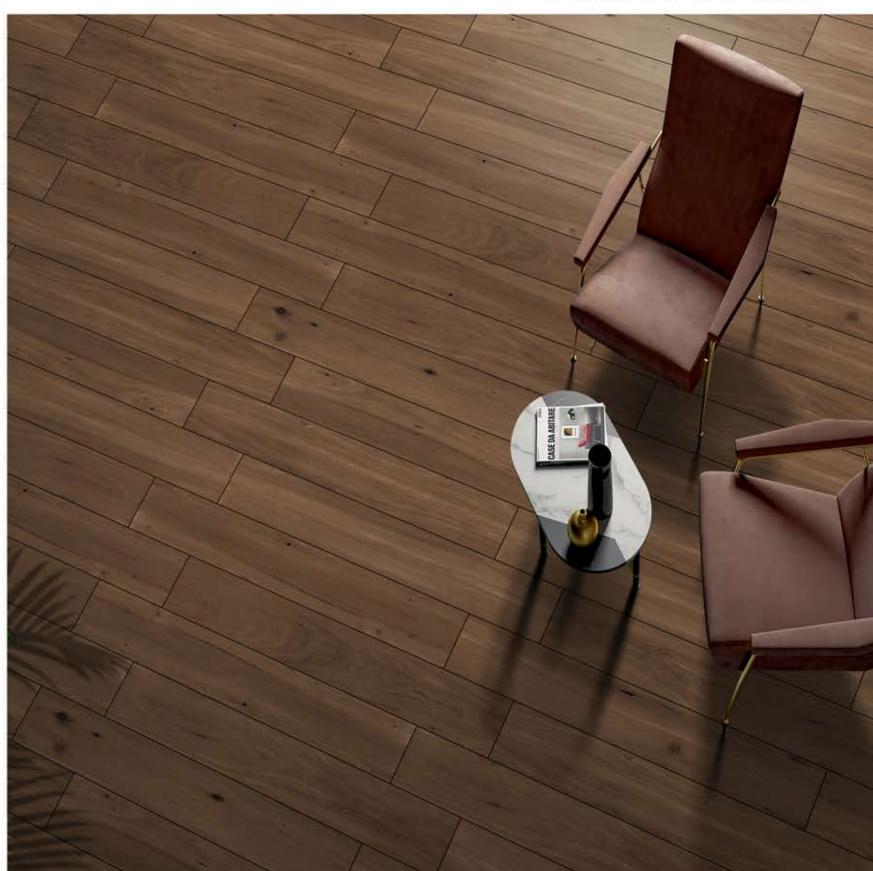








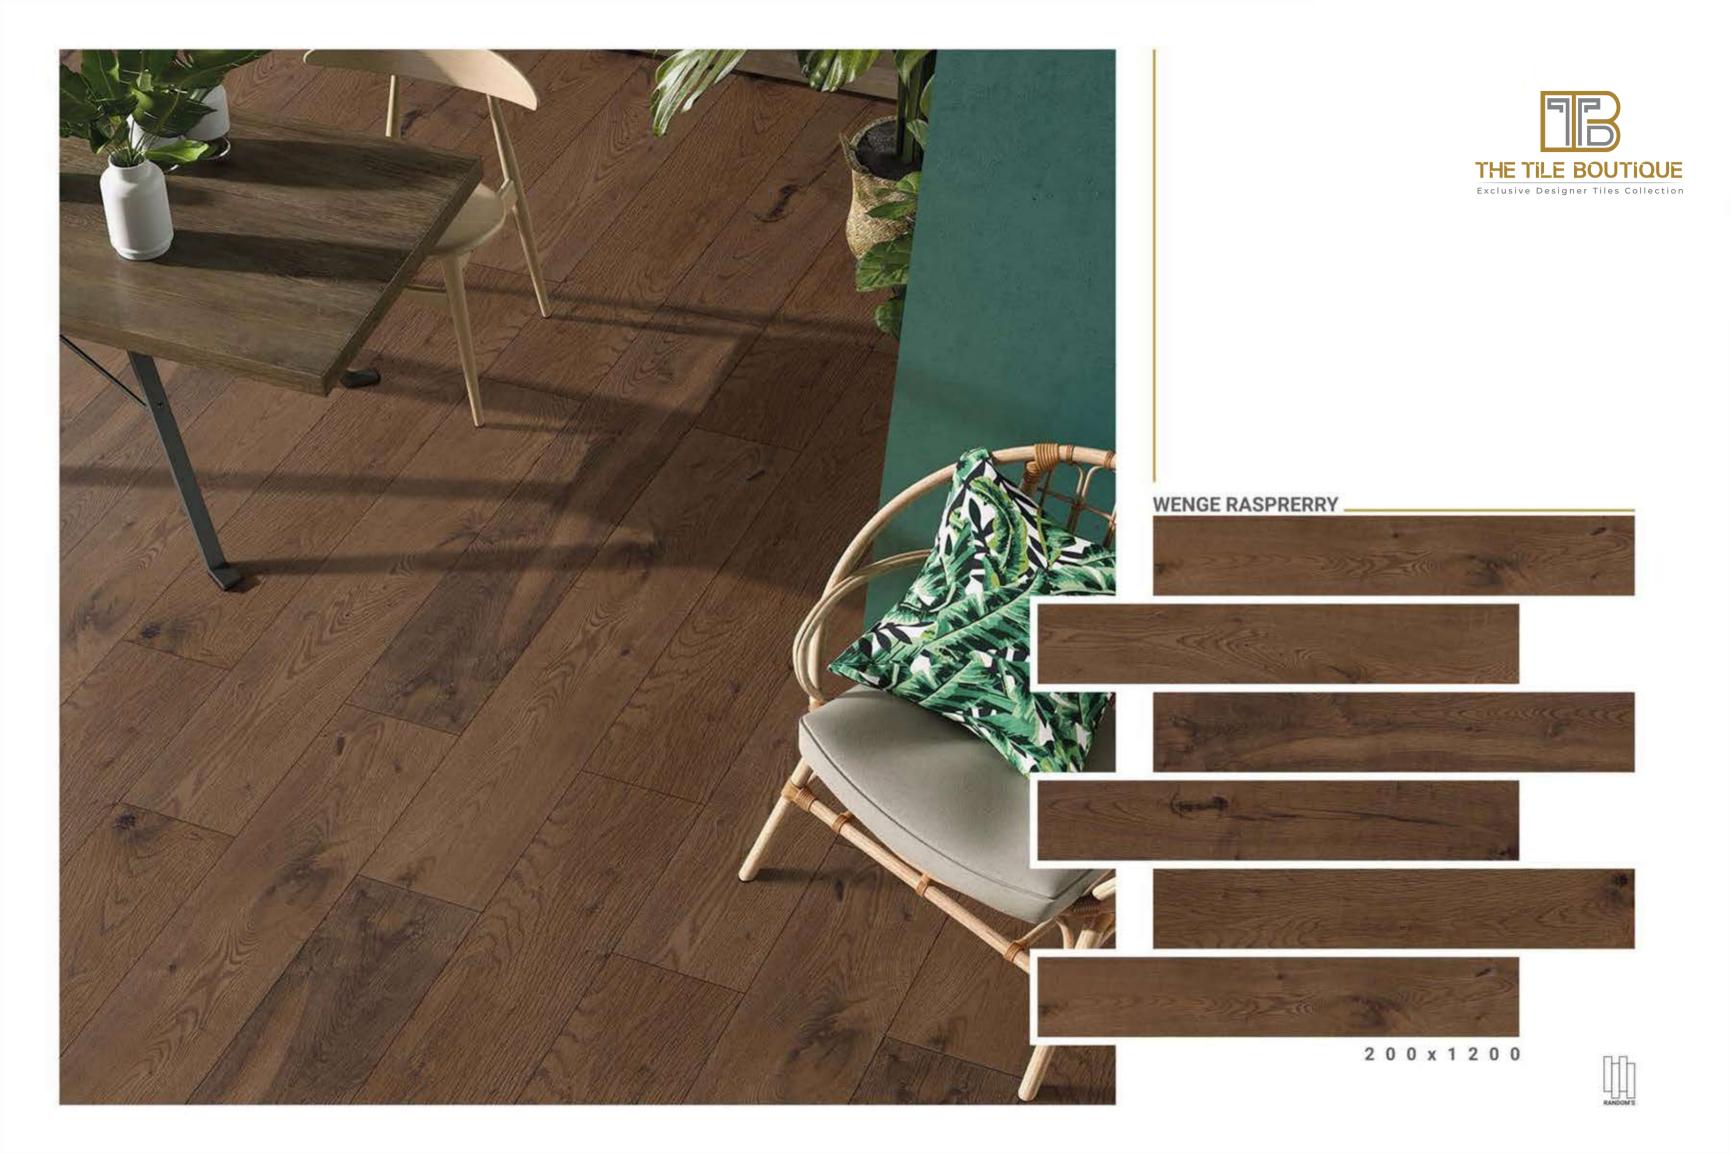



66

Designs that Awaken your Soul to Act.

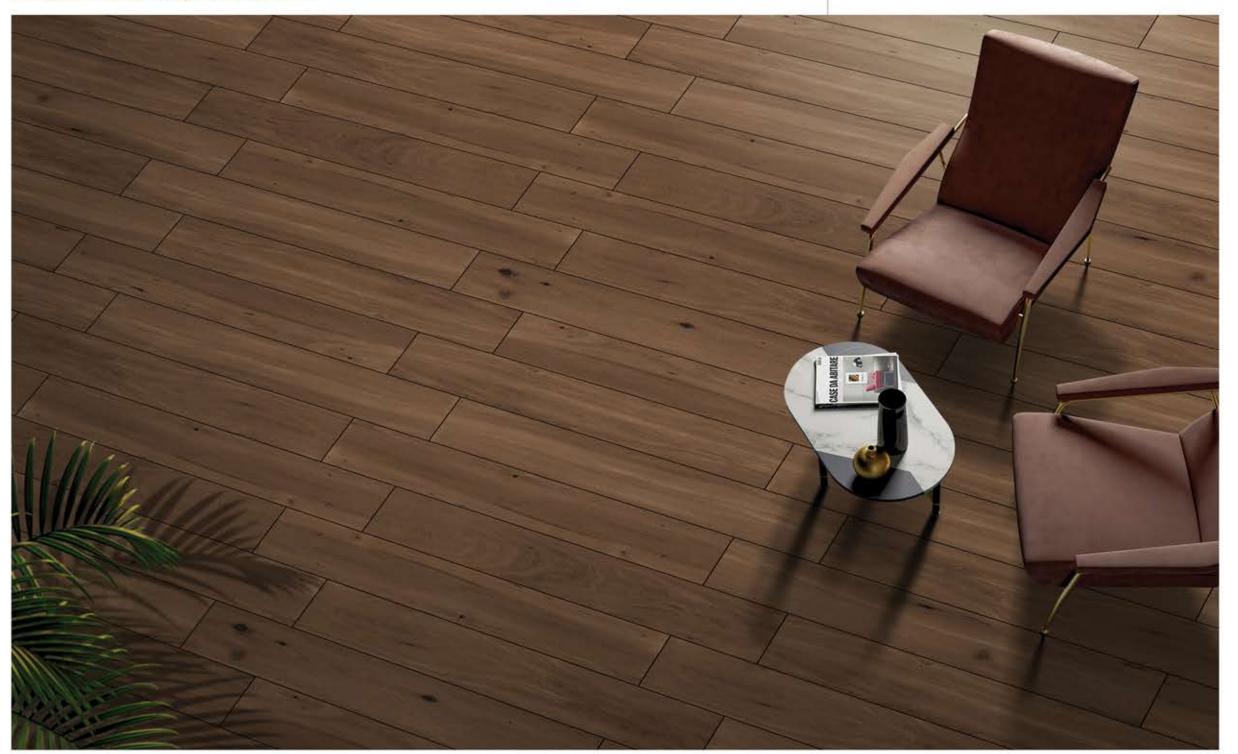

ROCKER FINISH




The Next Great Decor Is Yours.









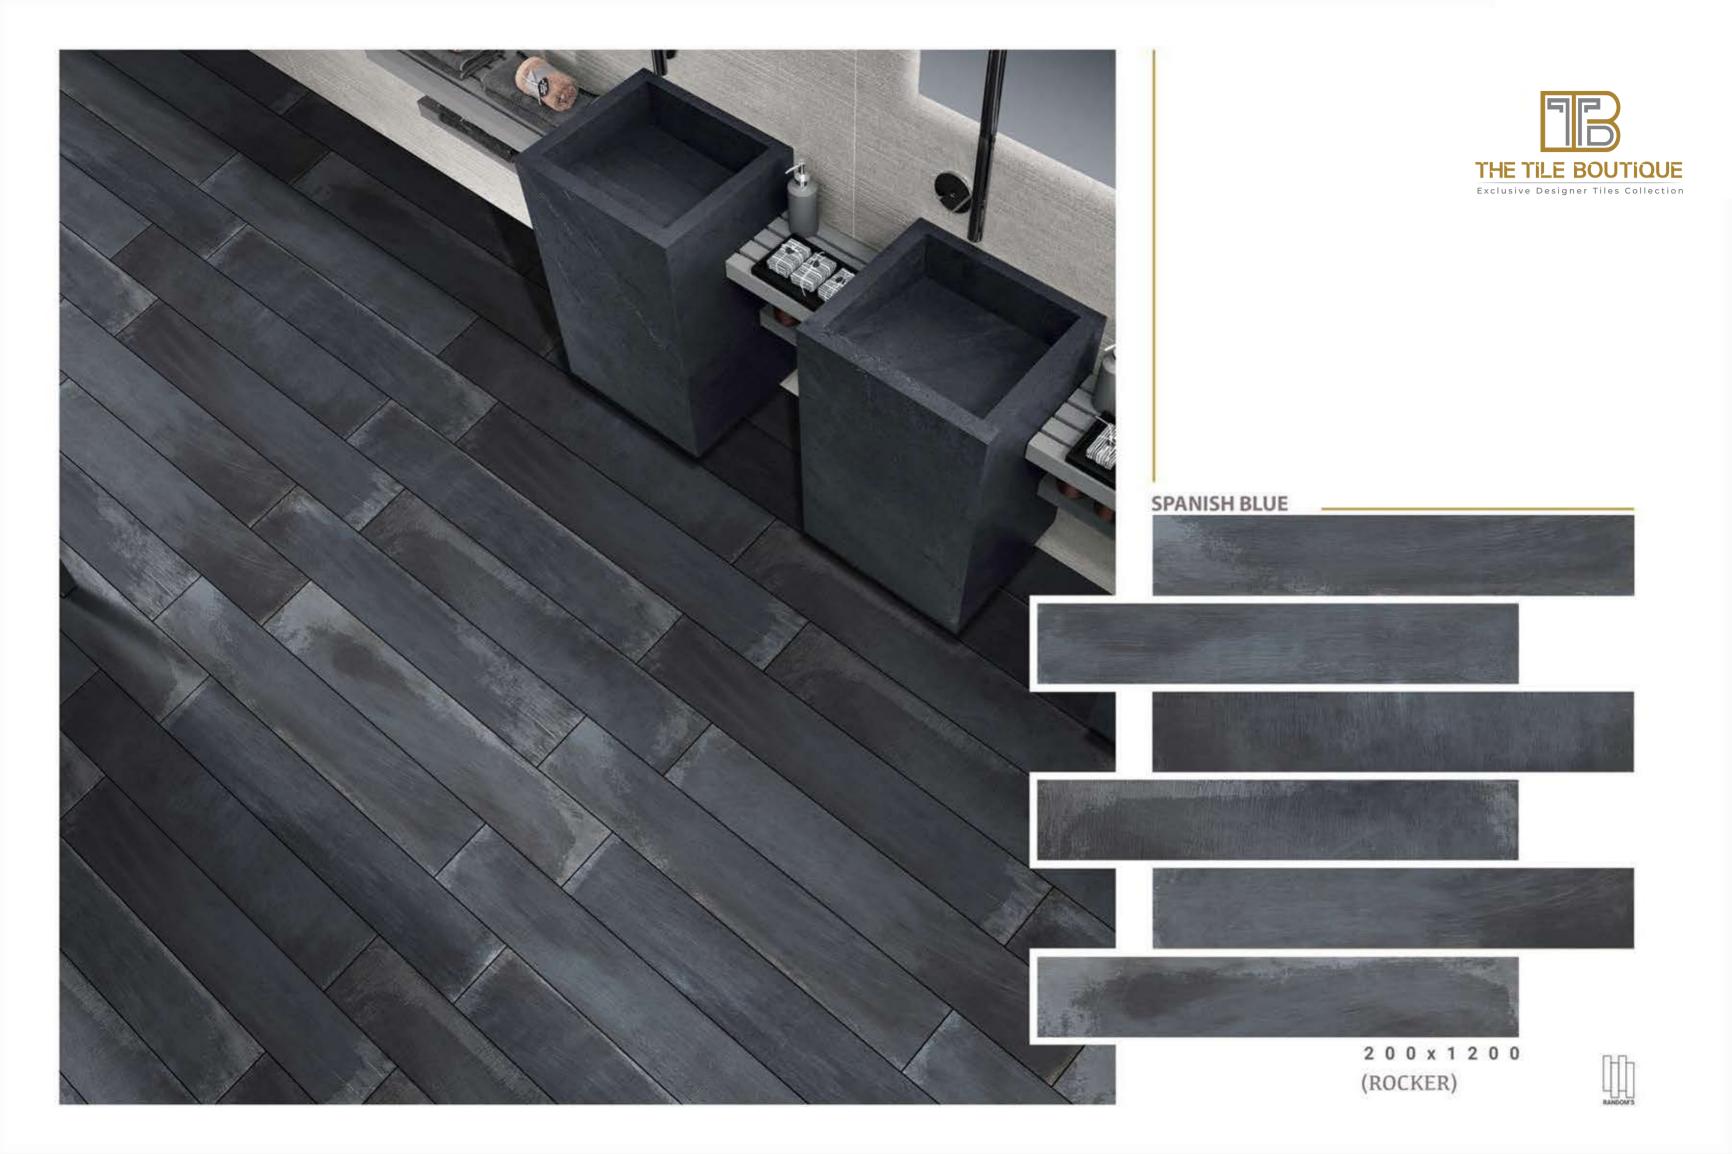











TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	LAVISH VALUE	TEST METHOD
EGULATORY PROPERTIES	'		
eviation in length & width	± 0.5%	± 0.3%	ISO - 10545-2
eviation in thickness	±0.5%	±4.0%	ISO-10545-2
traightness in side	±0.5%	±0.1%	ISO-10545-2
ectangularity	± 0.5%	± 0.1%	ISO-10545-2
urface flatness	± 0.5%	± 0.2%	ISO-10545-2
olor difference	Uniterned	No change	ISO-10545-16
ossiness	As per mfg.	Min 90%	GLOSSO METER
TRUCTURAL PROPERTIES			
ater absorption	< 0.50%	< 0.05%	ISO-10545-3
pparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
ASSIVE MECHANICAL PROPERTIES			
odulus of repture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4
reaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
npact resistance	As per mfg.	Min. 0.55	ISO-10545-5
URFACE MECHANICAL PROPERTIES			
esistance to surface abrasion (PEI Rating)	As per mfg.	Class 4	ISO-10545-7
OH's hardness	As per mfg.	Min 5	EN 101
HERMO HYGROMRTRIC PROPERTIES			
ost resistance	No damage	No damage	ISO-10545-12
hermal shock resistance	No damage	No damage	ISO-10545-9
oisture expansion	Nil	Nil	ISO-10545-10
hermal expansion (COE)	Max. 9.0x10 ⁻⁰	Max. 6.5x10°	ISO-10545-8
razing resistance	As per mfg.	Min 10 Cycle	ISO-10545-11
HEMICAL PROPERTIES			
hemical resistance	No damage	No damage	ISO-10545-13
tain resistance	Min. Class 3	Class 5	ISO-10545-14
EFETY PROPERTIES			
lip resistance	As per mfg.	> 0.40	ISO-10545-17
re resistance	As per mfg.	Fireproof	N.A.
ead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15

The information contained in this catalogue is a accurate as possible, but cannot be considered as legally binging. The Company reserves the right to make any modifications that become necessary due to production requirements. Weight colours and dimensions are subject to the inevitable variation typical of the ceramic firing process. The colours are possible to the actual colours, within the limits allowed by the printing process, for technical printing reasons, the colours shown may slightly differ from the actual tiles. LAVISH CERAMICS RESERVES THE RIGHT TO MODIFY THE TECHNICAL INFORMATION QUOTED IN THIS CATALOGUE.

PACKING DETAILS

Size	200x1200mm	
Pieces / Box	5. pcs.	
Area / Box	1.2sq. mtr.	
Weight / Box (approx*)	27.5.kgs.	